

Sensor-switched outdoor light

L 20 S

Stainless steel

EAN 4007841 566814

Article number 566814



Max. 60 W



Infrarot-Sensor
180°



Max. 10 m



IP44



Sensor 90° vertikal



2 - 2000 Lux



8 Sek - 35 Min



Schlagfest IK07



Ideal 2 m



Energie sparen

Function description

Ambience lighting squared. Designer sensor-switched outdoor light L 20 S, ideal for building entrances and building fronts, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 90° for exact adjustment of the detection zone, stainless-steel trim panel.

Technical specifications

Dimensions (L x W x H)	85 x 230 x 250 mm
With lamp	No
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Version	Stainless steel
PU1, EAN	4007841566814
Application, place	Outdoors
Application, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway
Installation site	wall
Impact resistance	IK07
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Stainless steel
Cover material	Plastic, opal

Mounting height max.	3,00 m
Slave modeselectable	No
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3 m (14 m ²)
Reach, tangential	r = 10 m (157 m ²)
Photo-cell controller	Yes
Abdeckmaterial Lieferumfang	sticker
Lamp	All-purpose lamp
Base	E27
Soft light start	No
Twilight setting	2 – 2000 lx
Time setting	8 s – 35 Min.
Basic light level function	No
Interconnection	No

<https://www.steinel.de>

Subject to technical modifications

02.2024 Page 1 from 2

Sensor-switched outdoor light

L 20 S

Stainless steel

EAN 4007841 566814

Article number 566814



Technical specifications

Mains power supply	230 – 240 V / 50 Hz
--------------------	---------------------


Output	60 W
--------	------

Power consumption	0,55 W
-------------------	--------

Optimum mounting height	2 m
-------------------------	-----

Detection angle	180 °
-----------------	-------

Detection Zone

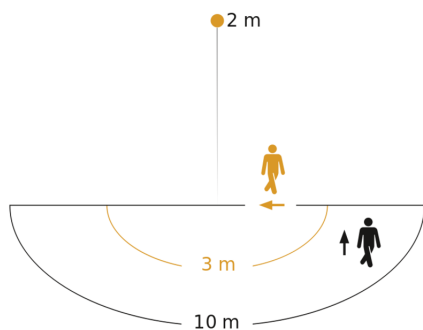


Possible mounting height: 1,80 m – 3,00 m

Orange: radial

Black: tangential

Dimension Drawing

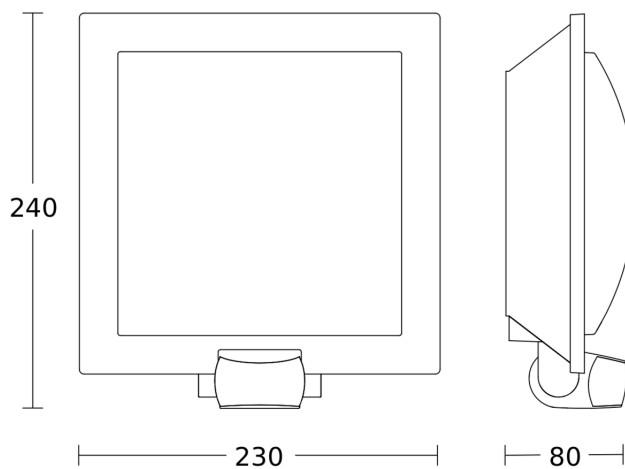

Circuit diagram

